







## ASPEN CANTILEVER UMBRELLA Assembly Instructions

Thank you for choosing the Aspen Umbrella from Design Concepts, please read these key tips:


- You will have excess screws and washers, please discard these.
- Packaging is under and inside your canopy. Please follow instructions on removal.
- Use your umbrella cover when not in use.
- If in doubt, wind it down! (Rated to 25km/h)

| CODE | DESCRIPTION                                                                                          | QTY |
|------|------------------------------------------------------------------------------------------------------|-----|
| A    |                     | 4   |
| B    |                     | 4   |
| C    | Discard  Do not use | 4   |
| D    |                    | 4   |
| E    |                   | 4   |
| F    |                   | 8   |
| G    |                   | 8   |
| H    |                   | 1   |
| I    |                   | 1   |
| J    |                   | 1   |
| K    |                   | 1   |
| L    |                   | 2   |
| M    |                   | 1   |
| N    |                   | 1   |
| O    |                   | 1   |


## ASSEMBLY

\* Failure to follow these instructions may result in ineffective operation and may also void warranty.


1. For ease of installation, securely lean the granite base (H) upright during steps 2-4.
2. Lock all brakes on the wheels (A) and screw each wheel into the underside of the base. Ensure wheels closest to the ground have the brakes facing upward away from the ground. DO NOT OVERTIGHTEN.

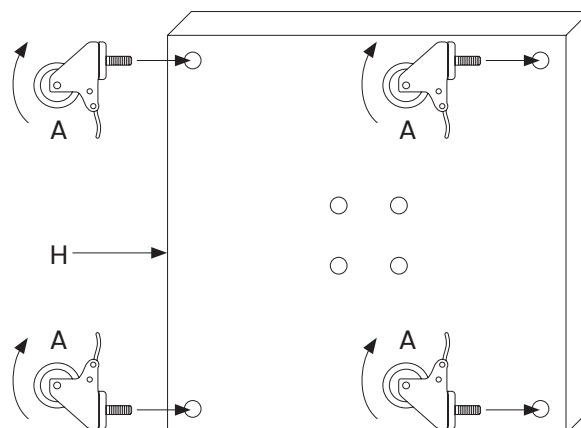

3. Attach rotation hub (I) onto base:
  - 4 x Longest Bolts (D) with the small washer (F) onto the top.
  - 4 x nuts (E) and larger washers (G) on underside.
  - Tighten using allen key on upside and spanner on underside (O).
4. Lower base onto ground.

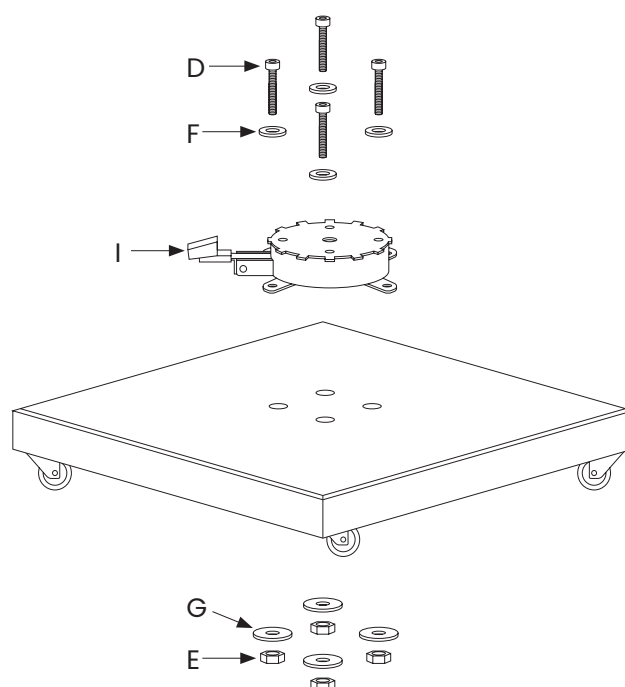

5. Slide the umbrella stem (**J**) from the base of the umbrella frame (**N**). Ensure you unscrew the black hand screws (**L**) before removing.
6. Attach stem (**J**) to the rotation plate using 4 x small washers (**F**) and 4 x shorter hex head screws (**B**).
7. Place black plastic cover (**K**) over the rotation hub and umbrella stem. Ensure groove on black plastic cover is rotated and placed as per picture below.

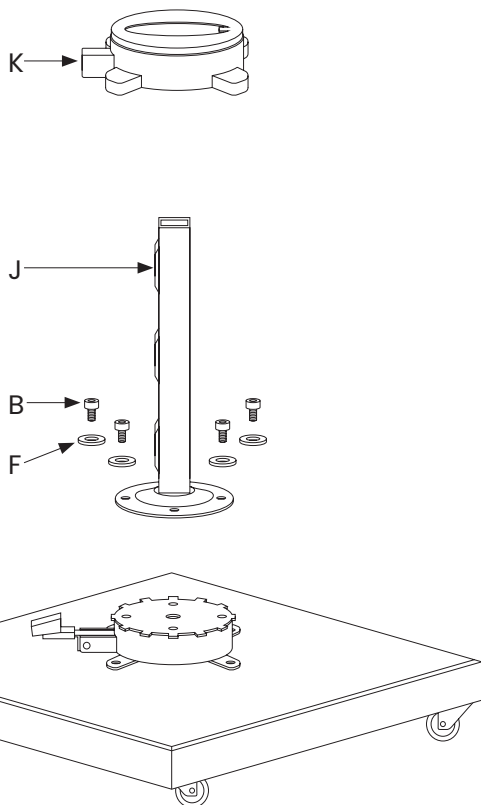

## LAST TIPS

11. You will have 4 screws and 4 washers left over from the blister pack. This is normal. You will also have two large washers on the longer bolts that go through the base. You can use two large washers per screw, or dispose of the extra one.
12. Enjoy. Take the brakes off the wheels by lifting, and wheel the umbrella to where you want it, then relax.

8. Remove plastic sleeve from umbrella. Ensure holes on umbrella frame are going to align with the holes on the stem. Lower umbrella frame (**N**) onto stem (**J**). Secure using black hand screws (**L**).
9. Reach under canopy and remove large cardboard that secures all of the underarms together.  
*\* This MUST be completed before winding open.*
10. Attach wind handle (**M**). A half to full 360 circle on the winder can be completed to give room under the umbrella to remove remaining packaging. Complete a full open and close to ensure all packaging has been removed.

