




**SWITCH ON.
GO WIRELESS.**

BROMIC SMART-HEAT™ CONTROLS

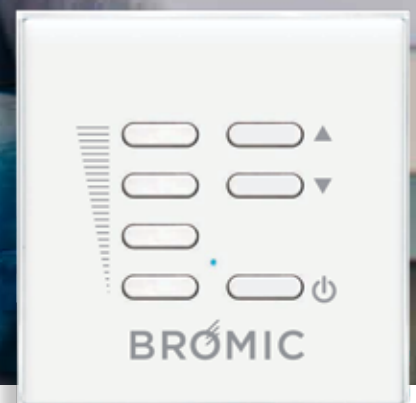

BROMIC[®]
HEATING

enquiries@bromic.com
bromic.com/[gowireless](#)

CONTROL OPTION SIMPLE, SMART AND WIRELESS

Wireless Controls

Less wires means fast, easy installation saving you time and money.

Range of Control

30m (100 ft) range with no line of sight needed for control. Simply click and go.

Compact Design

Smart design allows for Wireless Remote to be hand held or wall mounted so it is easily hidden from sight, so as not to intrude on your space.

Simplified Wiring Installation

Greater controllability with one-touch pairing. No routing or control unit required.

Control your Heat Output

Vary your heat output for complete flexibility.



ON | OFF 4-CHANNEL REMOTE*
(GAS & ELECTRIC)

The Bromic Smart-Heat Wireless On | Off Controller can switch power supply to two separate outputs, enabling independent 'On | Off' control without even having to move from your seat.



DIMMER CONTROLLER*
(ELECTRIC ONLY)

The Bromic Smart-Heat™ Wireless Dimmer Controller allows you to adjust the heat from 1-100% for perfect comfort and complete flexibility.



BROMIC SMART-HEAT™ LINK

The Bromic Smart-Heat™ Link is compatible with some of the leading Home Automation systems, allowing you to easily control your Bromic outdoor heaters from your home automation control panel.*

* Requires RS232 plugin


FOCUS ON WHAT YOU ENJOY DOING.

With wireless remote options available for your outdoor heating solutions, switch on comfort effortlessly.

From a single point you can control multiple heaters, turning them off & on as well as dimming the heat outputs for electric models.


The Smart-Heat™ range of controllers provide a simple, yet powerful solution to controlling your environment, making outdoor heating easy.


CONTROLS SIMPLE, SMART AND WIRELESS

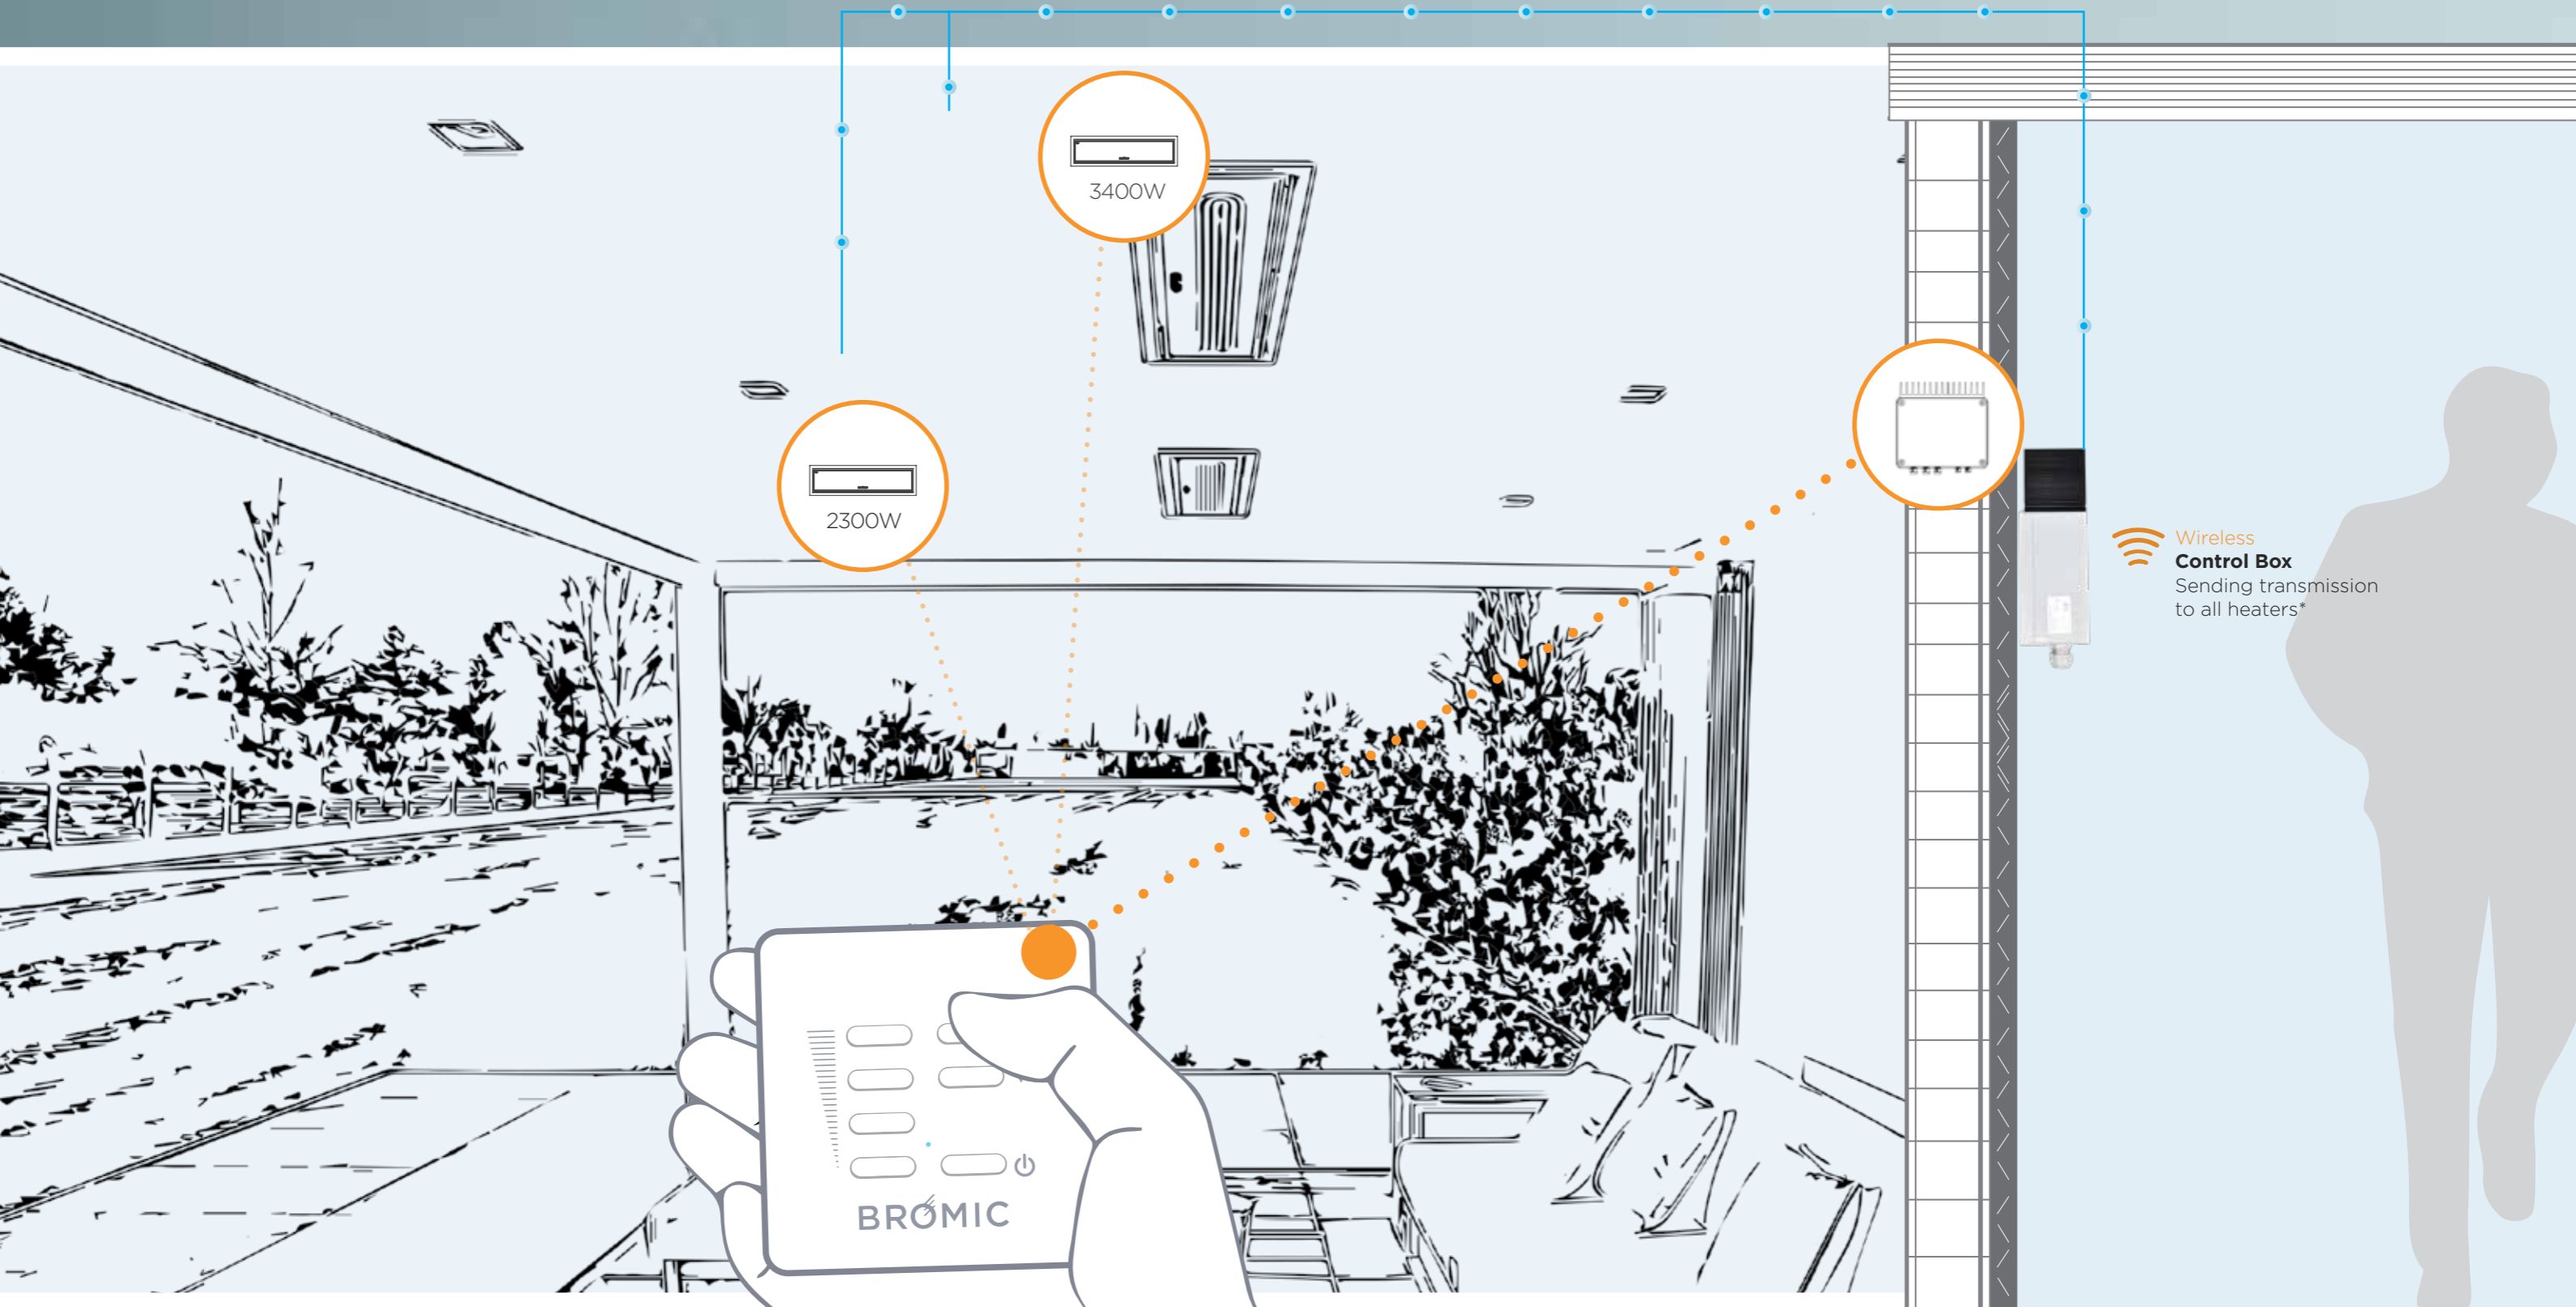

Outdoor area

Indoor room

 **Wireless Control Box**
Sending transmission to all heaters*

 **Smart-Heat Wireless Dimmer Controller**
Allows the power output of a heater to be adjusted for perfect comfort, with the ability to adjust multiple units in unison with a single remote



*Image shown is for electric dimmer only

WIRING DIAGRAMS SET UP SOLUTIONS


Electric Heater Solution

INSTALLATION OPTIONS

Option 1:	1 x 6000W
Option 2:	1 x 4000W
Option 3:	2 x 3400W
Option 4:	2 x 3000W
Option 5:	2 x 2000W

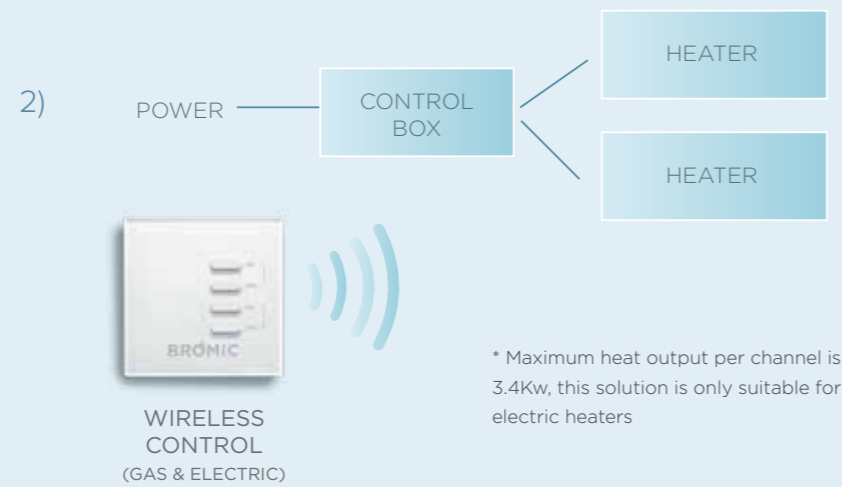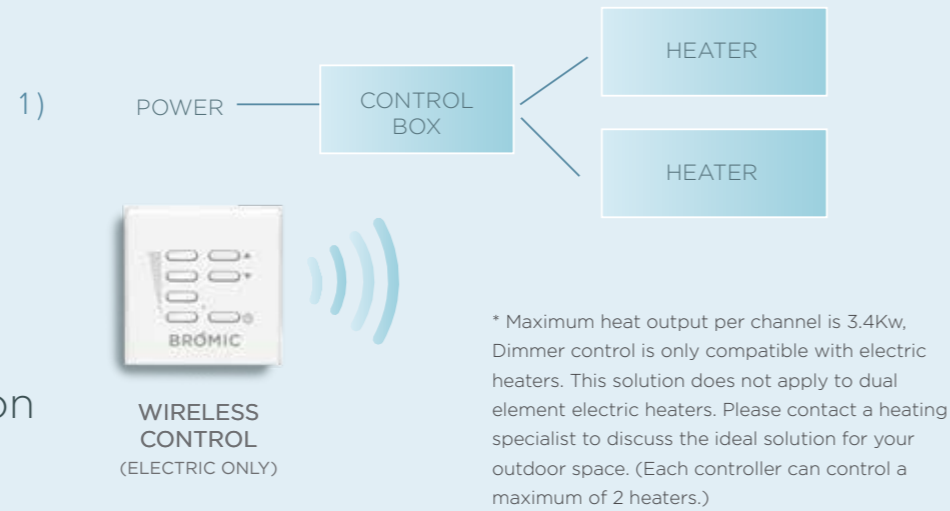

Gas Heater Solution

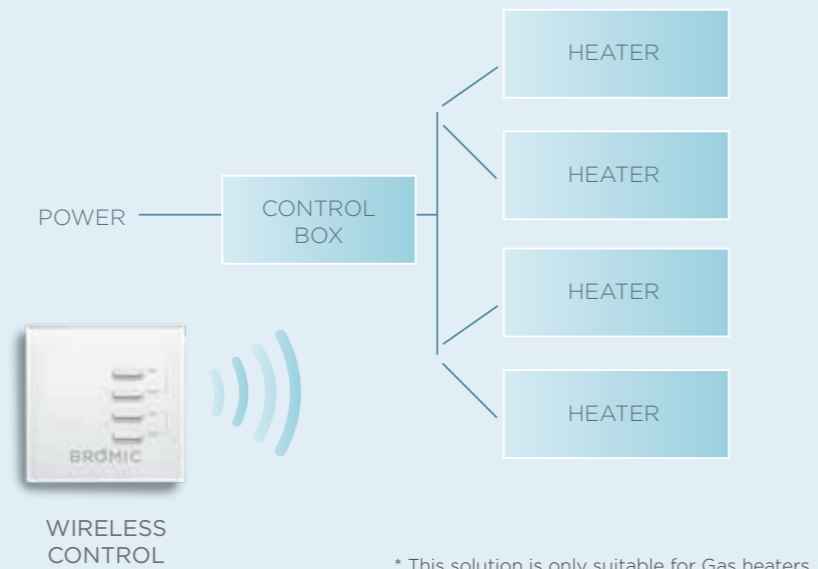

ON | OFF SMART-HEAT™ CONTROLLER

GAS & ELECTRIC

MODEL NUMBER	2620275-1
POWER SUPPLY	110/230VAC, 31A max, Single Phase
MAX OUTPUT POWER CHANNEL	3400W @ 230VAC 1500W @ 110VAC
FUSE PROTECTION	32A (FWC high speed)
RECEPTION FREQUENCY	916MHz
OPERATING TEMPERATURE RANGE	-20/+50°C
MAXIMUM # OF REMOTES CONNECTED PER CONTROL BOX	42 (84 heaters per controller)
DIMENSIONS	205 x 145 x 85mm
PROTECTION CLASS	IP54



DIMMER SMART-HEAT™ CONTROLLER

ELECTRIC ONLY

MODEL NUMBER	2620276-1
POWER SUPPLY	110/277VAC 50/60Hz (29A.max)
MAX OUTPUT POWER CHANNEL	6800W @ 277VAC (25A) 6800W @ 240VAC (28.5A.) 3080W @ 110VAC (28A.)
FUSE PROTECTION	32A (FWC high speed)
RECEPTION FREQUENCY	916MHz
OPERATING TEMPERATURE RANGE	-20/+30°C
MAXIMUM # OF REMOTES CONNECTED PER CONTROL BOX	42 (84 heaters per controller)
DIMENSIONS	195 x 200 x 75mm
PROTECTION CLASS	IP54



HOME AUTOMATION

BROMIC SMART-HEAT™ LINK

MODEL NUMBER	2620279
POWER SUPPLY	+5VDC
CARRIER FREQUENCY	US/CA/AU 916 MHz, EU 868 MHz
TRANSMISSION RANGE TO CONTROLLER	30m
WORKING TEMPERATURE	-10°C to +55°C



BROMIC.COM/GOWIRELESS

v1_07.2021

ASIA PACIFIC

10 Phiney Place, Ingleburn
Sydney NSW 2565

enquiries@bromic.com
1300 276 642

NORTH AMERICA

18 Technology Drive, STE 143,
Irvine California 92618 USA

enquiries@bromic.com
1800 301 1293

EUROPE

Hoofdstraat 43,
Business Center De Bank
5481 AA Schijndel, The Netherlands

info@bromic.eu
+31 7370 41029